

High Precision TIG Automatic Welding System

Basic Information




Product Specification

- Highlight: TIG automatic welding system,
High Precision tig welding system,
Automatic tig welding system

Product Description

Welding Procedure:

For wall thickness 3mm(0.118")and below, to use single TIG welding to get one side welding double side shaping is reasonable on the other hand it is able to get perfect front-side shaping and less welding remaining, in order to minimize the welding distortion during the welding, automatic welding mechanism is necessary and used for better heat elimination. According to work piece wall thickness and particular requirement it could choose wire feeding or fusion, Fusion is applied wall thickness 2.5mm (0.1") below to get on side welding double side shaping. Wire feeding is applied for wall thickness 3mm (0.118") above.

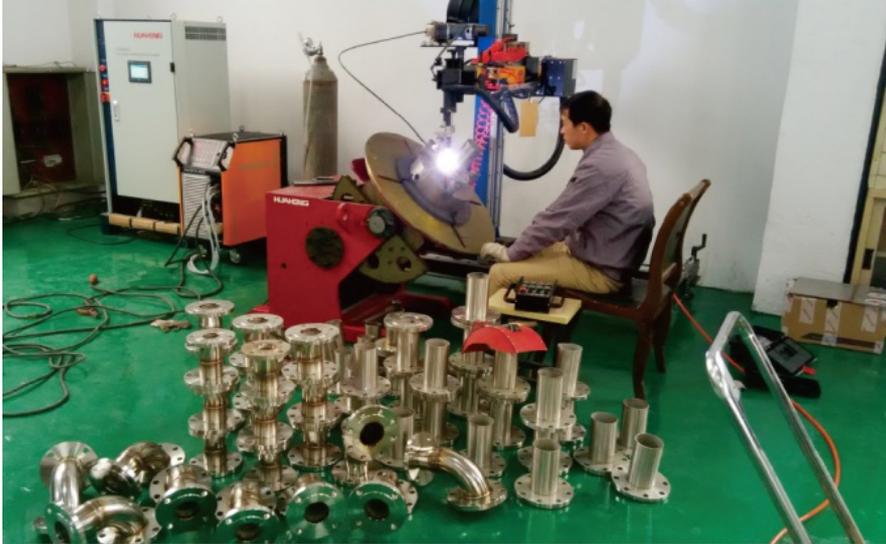





+86 13962665533



huaheng1995@gmail.com



huahengautomation.com

No.99 WuSongJiang Road, KunShan, JiangSu, PR.China PC.215334